


Aluminium and aluminium alloys — Foil —

**Part 1: Technical conditions for
inspection and delivery**

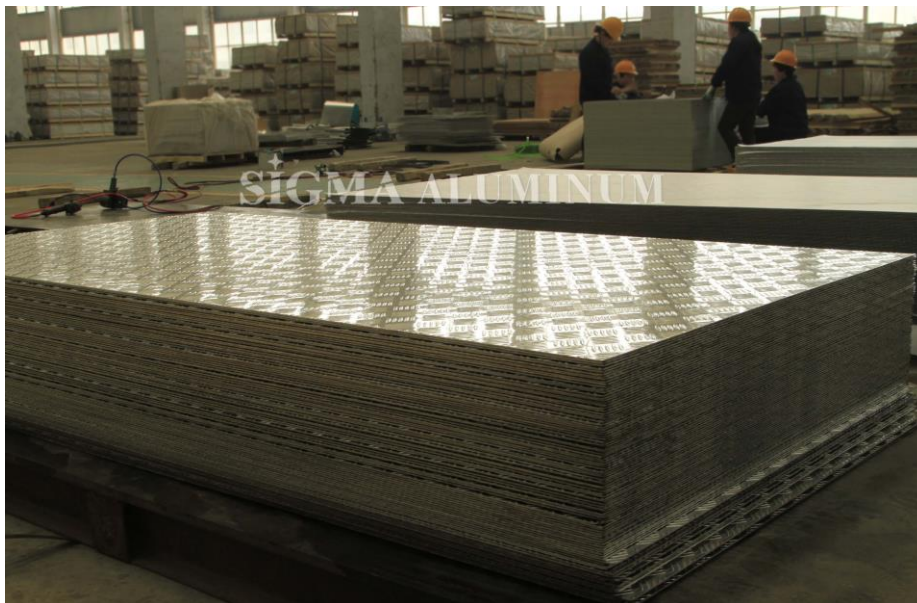

www.sigma-industry.com

SIGMA ALUMINUM

The European Standard EN 546-1:2006 has the status of a
British Standard

ICS 77.150.10

NO COPYING WITHOUT BSI PERMISSION EXCEPT AS PERMITTED BY COPYRIGHT LAW

BSi
British Standards

National foreword

This British Standard was published by BSI. It is the UK implementation of EN 546-1:2006. It supersedes BS EN 546-1:1997 which is withdrawn.

The UK participation in its preparation was entrusted to Technical Committee NFE/35, Light metals and their alloys.

A list of organizations represented on NFE/35 can be obtained on request to its secretary.

This publication does not purport to include all the necessary provisions of a contract. Users are responsible for its correct application.

Compliance with a British Standard cannot confer immunity from legal obligations.

This British Standard was published under the authority of the Standards Policy and Strategy Committee on 28 February 2007

© BSI 2007

ISBN 978 0 580 50136 4

Amendments issued since publication

Amd. No.	Date	Comments

English Version

Aluminium and aluminium alloys - Foil - Part 1: Technical conditions for inspection and delivery

Aluminium et alliages d'aluminium - Feuille mince - Partie 1
: Conditions techniques de contrôle et de livraison

Aluminium und Aluminiumlegierungen - Folien - Teil 1:
Technische Lieferbedingungen

This European Standard was approved by CEN on 25 November 2006.

CEN members are bound to comply with the CEN/CENELEC Internal Regulations which stipulate the conditions for giving this European Standard the status of a national standard without any alteration. Up-to-date lists and bibliographical references concerning such national standards may be obtained on application to the Central Secretariat or to any CEN member.

This European Standard exists in three official versions (English, French, German). A version in any other language made by translation under the responsibility of a CEN member into its own language and notified to the Central Secretariat has the same status as the official versions.

CEN members are the national standards bodies of Austria, Belgium, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.



EUROPEAN COMMITTEE FOR STANDARDIZATION
COMITÉ EUROPÉEN DE NORMALISATION
EUROPÄISCHES KOMITEE FÜR NORMUNG

Management Centre: rue de Stassart, 36 B-1050 Brussels

Contents

Page

Foreword.....	3
1 Scope	4
2 Normative references	4
3 Terms and definitions.....	4
4 Ordering information	5
5 Requirements	5
5.1 Production and manufacturing processes.....	5
5.2 Quality control.....	6
5.3 Chemical composition.....	6
5.4 Mechanical properties	6
5.5 Freedom from defects	6
5.6 Tolerances on dimensions.....	6
5.7 Special properties	6
6 Test procedure	6
6.1 Sampling	6
6.2 Methods of testing	8
6.3 Retests	8
7 Conformity with standards	9
8 Marking of products	9
9 Packaging	9
10 Complaints of non-conformity	9
Bibliography	10

Foreword

This document (EN 546-1:2006) has been prepared by Technical Committee CEN/TC 132 "Aluminium and aluminium alloys", the secretariat of which is held by AFNOR.

This European Standard shall be given the status of a national standard, either by publication of an identical text or by endorsement, at the latest by June 2007, and conflicting national standards shall be withdrawn at the latest by June 2007.

This document supersedes EN 546-1:1996.

Within its programme of work, Technical Committee CEN/TC 132 entrusted CEN/TC 132/WG 6 "Foil and finstock" to revise EN 546-1:1996.

The following modifications have been made:

- Clause 3: deletion of subclauses 3.1 to 3.6. Reference to EN 12258-1, and definition of converter foil, consumer/household foil and container foil added;
- Clause 4: title is changed, and wording is clarified;
- subclauses 5.2, 6.1.1 and 6.2.1: text amended.

EN 546 comprises the following parts under the general title "*Aluminium and aluminium alloys – Foil*":

- *Part 1: Technical conditions for inspection and delivery*
- *Part 2: Mechanical properties*
- *Part 3: Tolerances on dimensions*
- *Part 4: Special property requirements*

Attention is drawn to the possibility that some of the elements of this document may be the subject of patent rights. CEN shall not be held responsible for identifying any or all such patent rights.

CEN/TC 132 affirms it is its policy that in the case when a patentee refuses to grant licenses on standardised standard products under reasonable and not discriminatory conditions, then this product shall be removed from the corresponding standard.

According to the CEN/CENELEC Internal Regulations, the national standards organizations of the following countries are bound to implement this European Standard: Austria, Belgium, Cyprus, Czech Republic, Denmark, Estonia, Finland, France, Germany, Greece, Hungary, Iceland, Ireland, Italy, Latvia, Lithuania, Luxembourg, Malta, Netherlands, Norway, Poland, Portugal, Romania, Slovakia, Slovenia, Spain, Sweden, Switzerland and United Kingdom.

1 Scope

This document specifies the technical conditions for inspection and delivery of wrought aluminium and aluminium alloy foil. The gauge range covered is 6 μm to 200 μm .

It does not apply to lacquered, painted, embossed or laminated products.

2 Normative references

The following referenced documents are indispensable for the application of this document. For dated references, only the edition cited applies. For undated references, the latest edition of the referenced document (including any amendments) applies.

EN 515, *Aluminium and aluminium alloys — Wrought products — Temper designations*

EN 546-2, *Aluminium and aluminium alloys — Foil — Part 2: Mechanical properties*

EN 546-3, *Aluminium and aluminium alloys — Foil — Part 3: Tolerances on dimensions*

EN 546-4, *Aluminium and aluminium alloys — Foil — Part 4: Special property requirements*

EN 573-3, *Aluminium and aluminium alloys — Chemical composition and form of wrought products — Part 3: Chemical composition*

EN 12258-1:1998, *Aluminium and aluminium alloys — Terms and definitions — Part 1: General terms*

EN 14242, *Aluminium and aluminium alloys — Chemical analysis — Inductively coupled plasma optical emission spectral analysis*

EN 14361, *Aluminium and aluminium alloys — Chemical analysis — Sampling from metal melts*

3 Terms and definitions

For the purposes of this document, the terms and definitions given in EN 12258-1:1998 and the following apply.

3.1

converter foil

rolled aluminium in the gauge range of 6 μm to 200 μm , produced either by double rolling or single rolling, typically soft annealed and supplied for further processing such as lacquering or laminating

3.2

consumer/household foil

foil in the gauge range of 10 μm to 24 μm , intended for general use, principally for use in culinary applications such as cooking and storage

3.3

container foil

single rolled material in the gauge range 35 μm to 200 μm , produced at soft or intermediate temper and often involving alloys of the 3xxx and 8xxx series. The foil can be coloured/printed, and is usually supplied lubricated for press forming into smooth or wrinkled walled containers for foodstuffs and the like

4 Ordering information

The order shall specify the product required and shall contain the following information :

- a) description of the product:
 - type of converting and intended use;
 - alloy designation;
 - form of the product, i.e. single-rolled or double-rolled;
- b) temper designation of the material to be delivered as defined in EN 515;
- c) number of this European Standard EN 546-1, or separate specification, if any;
- d) dimensions of the product:
 - thickness;
 - width and type of specified tolerance on width as defined in EN 546-3 (symmetrical, only plus, only minus);
 - internal and external diameter of the coil/reel;
 - core size and type;
- e) quantity (mass);
- f) type of lubrication, if specific;
- g) any special requirements agreed between purchaser and supplier, e.g:
 - test certificates and inspection reports;
 - marking of the products, e.g. identification, flagging of joints, etc;
 - reference to drawings, e.g. for packaging, cores, etc;
 - wettability;
 - bright or matt outer surface of coil/reel (if double rolled).

If special requirements are specified, the application shall be stated.

5 Requirements

5.1 Production and manufacturing processes

Unless otherwise specified in the order, the production and manufacturing processes shall be left to the discretion of the supplier. Unless it is explicitly stated in the order, no obligation shall be placed on the supplier to use the same process for subsequent and similar orders.

5.2 Quality control

The manufacturer shall establish and maintain a quality management system, which should be at least equivalent to EN ISO 9001.

The manufacturer shall establish and maintain inspection plans defining all inspections and tests to be performed on the product to fulfil the requirements of this standard and any other requirement agreed according to Clause 6 of the present standard, their frequency and the type of record to be established. The inspection plan shall specify for each inspection or test whether it is to be performed per cast, per heat treatment batch, per inspection lot as defined in EN 12258-1 or per any other lot of importance. The inspection plan shall conform as a minimum to the test procedures and test requirements stipulated in this standard. The inspection plan shall include additional schemes for appropriate process control. If required the inspection plan shall be submitted to the purchaser for approval before start of production.

The manufacturer shall be responsible for carrying out all inspections and tests required by this standard, prior to the shipment of the product. If the purchaser wishes to inspect the product at the manufacturer's site of production, he shall stipulate this at the time of placing the order.

The extent of inspections shall be in accordance with Clause 6 of the present standard. Unless explicitly stated quality controls and inspections shall be performed on inspection lots. Products included in one inspection lot shall be manufactured in the same production unit.

5.3 Chemical composition

The chemical composition shall be in conformity with the requirements specified in EN 573-3.

5.4 Mechanical properties

The mechanical properties shall be in conformity with EN 546-2.

5.5 Freedom from defects

The product shall be free from defects prejudicial to its suitable and proper use.

5.6 Tolerances on dimensions

The tolerances on dimensions shall be in conformity with EN 546-3.

5.7 Special properties

Special property requirements shall be agreed between purchaser and supplier.

6 Test procedure

6.1 Sampling

6.1.1 Samples for chemical analysis

Sampling shall be carried out at the time of casting according to EN 14361. The average content of each sample shall be within the specification for the chemical composition.

NOTE EN 14361 includes criteria how to determine number, volume and shape of samples, about time and location of sampling and about the design and maintenance of the tools, in order to make sure that the average chemical composition of the sample is representative of the average chemical composition of the whole melt.

6.1.2 Specimens for mechanical testing

6.1.2.1 Location and size

Specimens shall be taken from samples in such a way that it is possible to orientate the test pieces in relation to the product, as specified in 6.1.2.2. The specimens shall be large enough to allow manufacture of the test pieces necessary to carry out the required tests and shall include sufficient metal to allow manufacture of test pieces for any retests required.

6.1.2.2 Orientation

Specimens shall be taken in such a manner that the test pieces can be prepared in the longitudinal direction.

6.1.2.3 Identification

Each specimen shall be identified in such a way that after removal, it is still possible to identify the product from which it was taken and its location and orientation. If during the course of subsequent operations removal of the markings cannot be avoided, new markings shall be made before the originals are removed.

6.1.2.4 Preparation

Specimens shall be taken from the sample after completion of all the mechanical and heat treatment operations that the product has to undergo before delivery and which can influence the mechanical properties of the metal. In cases where this is not possible, the sample or specimens may be taken at an earlier stage, but they shall be subjected to the same treatment as that to which it is intended to submit the product concerned.

Cutting shall be carried out in such a manner that it does not change the characteristics of the part of the specimen from which the test pieces are to be prepared. Thus, the dimensions of the specimens shall provide an adequate allowance to permit removal of the zone affected by cutting.

Specimens shall not be treated in any way that alters their mechanical properties.

6.1.2.5 Number

The number of specimens taken shall be sufficient to provide statistical evidence of long-term product conformity to the relevant properties specified in EN 546-2.

When specific testing has been agreed between purchaser and supplier, the sampling frequency shall be increased to one specimen from each inspection lot of 10 000 kg or part thereof. For single coils weighing more than 10 000 kg each, only one specimen per coil shall be taken.

6.1.3 Test pieces for tensile test

6.1.3.1 Identification

Each test piece shall be marked in such a manner that it is possible to identify the inspection lot from which it was taken and, if required, its location and orientation in the product.

If a test piece is identified by stamping, this shall not be in a place or manner which can interfere with subsequent testing. Where it is not convenient to mark a test piece, an identification tag may be attached.

6.1.3.2 Number

One test piece shall be taken from each specimen.

EN 546-1:2006 (E)

6.1.3.3 Type

Flat test pieces shall be used for all thicknesses covered by EN 546-2. The test piece shall be prepared so that both surfaces are included undisturbed.

6.1.4 Other tests

For any other tests the procedures shall be as specified in EN 546-4.

6.2 Methods of testing

6.2.1 Analysis of chemical composition

The ranges of application and the accuracy of the test procedure used shall be validated and proved by the supplier.

In case of dispute concerning the chemical composition, referee analysis shall be carried out in accordance with EN 14242.

NOTE For the rapid determination of the chemical composition different spectral analysis methods are used (e.g. S-OES, XRF, GDOES). For S-OES see EN 14726.

6.2.2 Mechanical and physical tests

The tensile test shall be carried out in accordance with EN 546-2.

Other tests are specified in EN 546-4.

6.2.3 Measurement of dimensions

The dimensions shall be measured by means of measuring instruments which are capable of measuring to the accuracy required by the dimensions and the tolerances on dimensions specified in EN 546-3. All dimensions shall be checked at the ambient temperature of the workshop or laboratory, and, in case of dispute, at a temperature between 15 °C and 25 °C.

6.2.4 Surface finish

Unless otherwise specified, examination of surface appearance shall be carried out without the assistance of magnifying apparatus on products before delivery.

6.3 Retests

6.3.1 Chemical composition

If the analysis does not meet the chemical composition requirements specified in EN 573-3 or those agreed between purchaser and supplier, the cast shall be rejected.

6.3.2 Mechanical properties

If any one of the test pieces first selected fails to meet the requirements for the mechanical properties specified in EN 546-2, the following procedure shall be applied:

- if an error is clearly identified, in either the test piece preparation or the test procedure, then the corresponding result shall be disregarded and the test resumed as initially required;

- if an error is not identified, then two further specimens shall be taken from the same lot, at least one being from the same coil from which the original specimen was taken, unless that coil has been withdrawn by the supplier.

If both these specimens meet the requirement for mechanical properties, the lot which they represent shall be deemed to comply with the requirements of EN 546-2. If either or both of these specimens fail to meet the requirements for mechanical properties, the lot shall be deemed not to comply with EN 546-2.

6.3.3 Other properties

The retests of other properties shall be agreed between purchaser and supplier.

7 Conformity with standards

If requested by the purchaser on the order, the supplier shall provide a statement certifying that the products for delivery are in conformity with the relevant parts of EN 546 and with the additional requirements on the order as agreed with the supplier.

8 Marking of products

Marking of products shall only be undertaken when agreed between purchaser and supplier and stated on the order. This marking shall not adversely affect the final use of the product.

9 Packaging

Unless otherwise specified on the order, the method of packing shall be determined by the supplier who shall take all necessary precautions to ensure that, under the usual conditions of transportation, the products shall be delivered in a condition suitable for use.

10 Complaints of non-conformity

In cases of dispute concerning conformity with the requirements of this European Standard or specification cited on the order, before rejecting the products, testing and examination shall be carried out by an arbitrator chosen by mutual agreement between purchaser and supplier.

The arbitrator's decision shall be final.

Bibliography

EN ISO 9001, *Quality management systems — Requirements (ISO 9001:2000)*.

EN 14726, *Aluminium and aluminium alloys — Chemical analysis — Guideline for spark optical emission spectrometric analysis*.

BSI – British Standards Institution

BSI is the independent national body responsible for preparing British Standards. It presents the UK view on standards in Europe and at the international level. It is incorporated by Royal Charter.

Revisions

British Standards are updated by amendment or revision. Users of British Standards should make sure that they possess the latest amendments or editions.

It is the constant aim of BSI to improve the quality of our products and services. We would be grateful if anyone finding an inaccuracy or ambiguity while using this British Standard would inform the Secretary of the technical committee responsible, the identity of which can be found on the inside front cover.
Tel: +44 (0)20 8996 9000. Fax: +44 (0)20 8996 7400.

BSI offers members an individual updating service called PLUS which ensures that subscribers automatically receive the latest editions of standards.

Buying standards

Orders for all BSI, international and foreign standards publications should be addressed to Customer Services. Tel: +44 (0)20 8996 9001.
Fax: +44 (0)20 8996 7001. Email: orders@bsi-global.com. Standards are also available from the BSI website at <http://www.bsi-global.com>.

In response to orders for international standards, it is BSI policy to supply the BSI implementation of those that have been published as British Standards, unless otherwise requested.

Information on standards

BSI provides a wide range of information on national, European and international standards through its Library and its Technical Help to Exporters Service. Various BSI electronic information services are also available which give details on all its products and services. Contact the Information Centre.
Tel: +44 (0)20 8996 7111. Fax: +44 (0)20 8996 7048. Email: info@bsi-global.com.

Subscribing members of BSI are kept up to date with standards developments and receive substantial discounts on the purchase price of standards. For details of these and other benefits contact Membership Administration.
Tel: +44 (0)20 8996 7002. Fax: +44 (0)20 8996 7001.
Email: membership@bsi-global.com.

Information regarding online access to British Standards via British Standards Online can be found at <http://www.bsi-global.com/bsonline>.

Further information about BSI is available on the BSI website at <http://www.bsi-global.com>.

Copyright

Copyright subsists in all BSI publications. BSI also holds the copyright, in the UK, of the publications of the international standardization bodies. Except as permitted under the Copyright, Designs and Patents Act 1988 no extract may be reproduced, stored in a retrieval system or transmitted in any form or by any means – electronic, photocopying, recording or otherwise – without prior written permission from BSI.

This does not preclude the free use, in the course of implementing the standard, of necessary details such as symbols, and size, type or grade designations. If these details are to be used for any other purpose than implementation then the prior written permission of BSI must be obtained.

Details and advice can be obtained from the Copyright & Licensing Manager.
Tel: +44 (0)20 8996 7070. Fax: +44 (0)20 8996 7553.
Email: copyright@bsi-global.com.